LAVAT
Laboratory and Vacuum Technique

Tovární
ulice 35
281 03
Radim u
Kolína
Česká
Republika

www.lavat.cz
info@lavat.cz
321 792 312

Diaphragm pump VM 40 D


Zák. číslo: 2303 00 0000

The vacuum pump is a source of underpressure or pump for non-aggressive and non-explosive, dirt-free gases and wherever pure oil-free operation is required. Pumps can be used in laboratories, health, food, packing facilities, and the like. The working chambers can be interconnected in parallel, thus increasing the transport volume to double or in series, when we reach a reduction in the limit pressure. For smooth running of the pump, we recommend equally load both chambers.

Technické údaje

Limit suction pressure at serial connection	4 kPa
Limit suction pressure at paralel connection	14 kPa
Pumping speed at 105 Pa at serial connection	Cca 40 – 5% l/min
Pumping speed at 105 Pa at paralel connection	Cca 80 – 5% l/min
Output hose	Js 10
Input hose	Js 13
Engine power	180W
Power voltage	230V/50Hz
Weight	8,6 kg

Fotogalerie

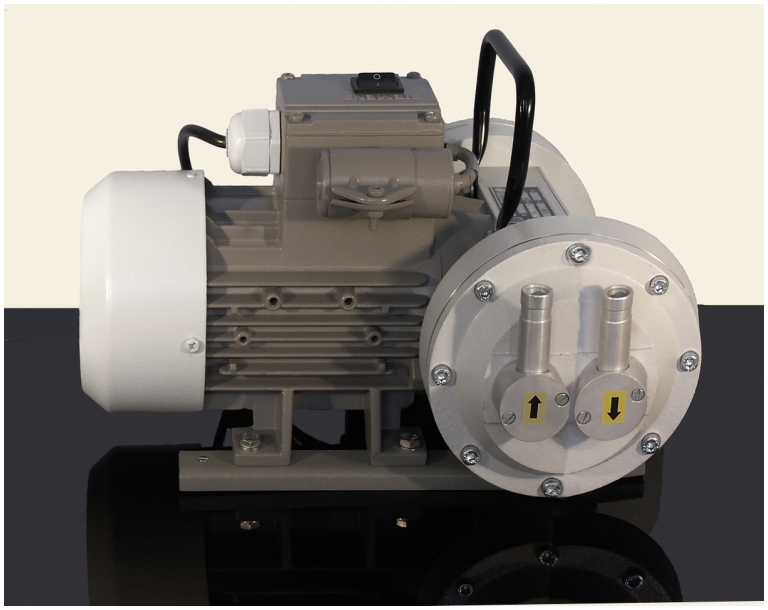

VÝVĚVA MEMBRÁNOVÁ VM40 D

