LAVAT
Laboratory and Vacuum Technique

Tovární
ulice 35
281 03
Radim u
Kolína
Česká
Republika

www.lavat.cz
info@lavat.cz
321 792 312

# PVC hose with embedded spring HNP 20

Номер заказчика: MX36350

PVC hose is structural component designed for flexible connections in vacuum instalations. Flexible robust hose is reinforced with embedded steel coil and hose cover is from transparent PVC. Working temperature is from - 5 to 65 °C. The minimum bending radius is applicable for a temperature of 20 °C. The bending radii increase at larger temperatures up to factor 1,5 at 50 °C.

## Технические данные

| | |
|---|---|
| Vnitřní hadice | Transparent PVC |
| Výztuha | Ocelová spirála |
| Povrch | Hladké vnitřní i vnější strany |
| Pro přírubu | KF 16 |
| Poloměr ohybu | 50 mm |
| Rozměr (L) | libovolný |
| Tlakový rozsah | od 1 x 10-4 hPa do 500 hPa |
| Rozsah pracovních teplot | - 5 až 65 °C |
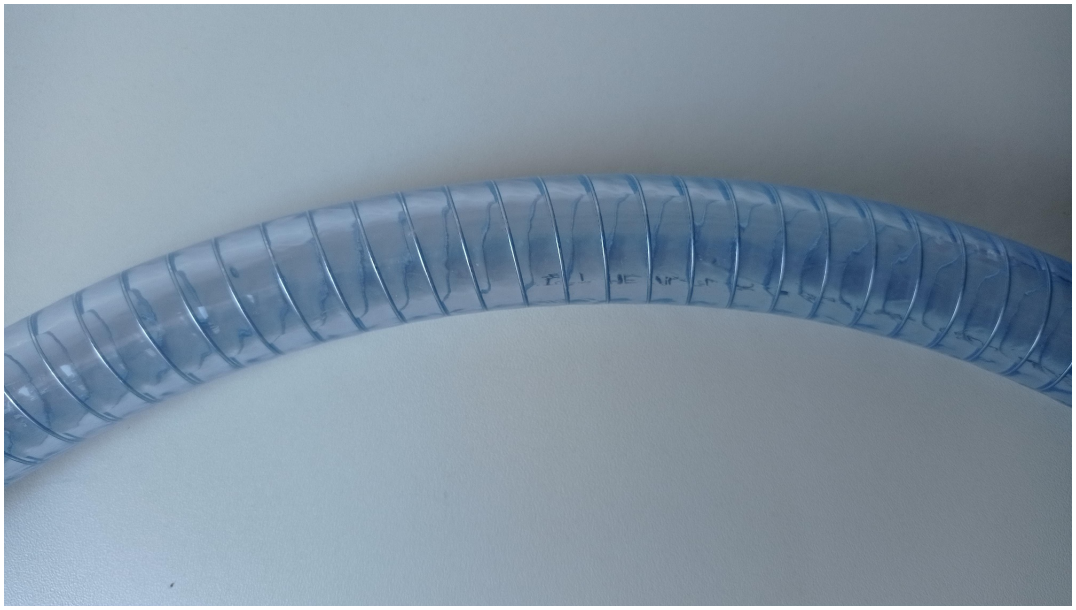
## Фотогалерея